HDS 12/18-4 S

Super class hot water high-pressure cleaner with water-cooled, slow-running, 4-pole electric motor, robust 3-piston axial pump and 2 detergent tanks.













Order no.

1.071-959.0


- Robust, 3-piston axial pump
- Save time and energy: EASY!Force high-pressure gun and EASY!Lock quick-release fasteners
- 2 cleaning agent tanks with rinse function

Technical data		
EAN code		4066529078414
Flow rate	l/h	500 - 1200
Working pressure	bar / MPa	30 - 180 / 3 - 18
Temperature (for supply 12 °C)	°C	min. 80 - max. 155
Connected load	kW	8
Power cable	m	5
Fuel tank	1	25
Weight (with accessories)	kg	190
Weight incl. packaging	kg	199.9
Dimensions (L × W × H)	mm	1330 × 750 × 1060

_		
Equipment		
Spray gun		EASY!Force Advanced
High-pressure hose length	m	10
High-pressure hose type		Longlife
High-pressure hose specification		DN 8, 400 bar
Spray lance	mm	1050
Power nozzle		
Pressure switch-off		
Option for the 2 spray lance operation		-
Pole reverse plug (3~)		
Soft Damping System (SDS)		
Servo control		
2 cleaning agent tanks		
Dry-running protection		

Included in the scope of supply.

Users must receive training on this device.

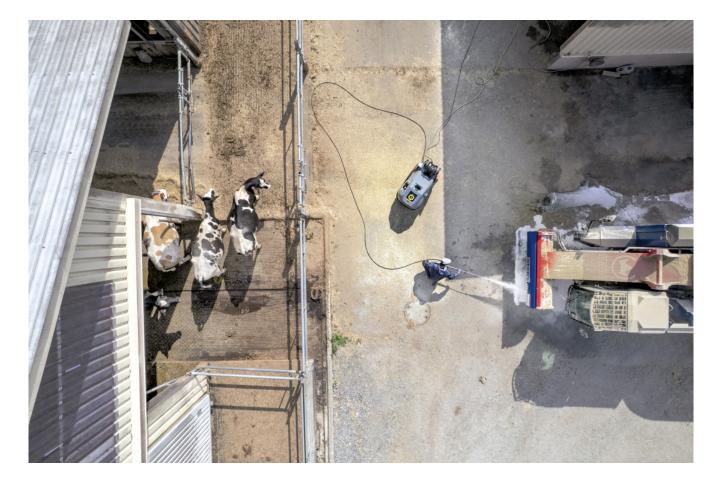



High efficiency

- In eco!efficiency mode, the machine operates in the most economical temperature range (60 °C) – with full water flow.
- The burner cycles are optimised to reduce fuel consumption by 20% compared to full load operation.



Maximum efficiency

- Highly efficient, tried-and-tested "Made in Germany" burner technology.
- 4-pole electric motor with 3-piston axial pump.
- Water-cooled motor for a high performance and long service life.



Multiple storage spaces for accessories integrated into the machine

- On-board storage for full range of accessories.
 Includes 2 hooks for suction hose and power cord.
- Spacious storage compartment, e.g. for detergents, gloves or tools.



























14

				\top
		Order no.	Description	
TRIGGER GUNS				
Spray guns				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	
EASY!Force conversion kit 1 - from high-pressure hose	2	4.111-050.0	For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	
EASY!Force conversion kit 2 - from machine	3	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	
EASY!Force conversion kit 3 - high-pressure gun	4	4.111-052.0	Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.	
Servo control				
Servo Control, 1100 l/h -	5	4.118-009.0	Water quantity and pressure regulated directly from the hand spray gun.	
SPRAY LANCES		<u> </u>		
Rotating spray lances				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
LED nozzle light	7	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	
Spray lance, 250 mm, rotatable	8	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	
Spray lance, 400 mm, rotatable	9	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	
Spray lance, 600 mm, rotatable	10	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 840 mm, rotatable	11	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 1550 mm, rotatable	12	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 2050 mm, rotatable	13	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance extender, 1000 mm	14	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	

lacksquare Included in the scope of supply. \qed Available accessories.





















CDDAYLANCEC		Order no.	Description	1	
SPRAY LANCES Double lance					
Double lance, 960 mm	15	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).		
Angular spray lance				Ť	
Spray lance for toilets and rain gutters	16	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	[
Flexible spray lance					
Flexible lance, 1050 mm	17	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140° , ideal for cleaning difficult to reach areas, e.g. gutters.		
High pressure articulated joint	18	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	[
Gutter cleaner					
Gutter cleaning lance	19	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	1 [
Undercarriage spray lance					
Underbody lance	20	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	[
Additional handle					
Additional handle for EASY!Lock spray lances	21	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.		
KÄRCHER POWER NOZZLE				Ė	
Power nozzle spray angle 25°					
Power nozzle 25°, 068	22	2.113-027.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	ı	
Power nozzle , 070	23	2.113-028.0			
HP nozzle spray angle 0°		'		Ť	
Power nozzle 0°, 075	24	2.113-037.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.		
Power nozzle spray angle 15°		'			
Power nozzle 15°, 070	25	2.113-049.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.		
Power nozzle spray angle 40°		'		Ť	
Power nozzle 40°, 075	26	2.113-056.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	[
HIGH-PRESSURE HOSES	<u>'</u>			Ť	
Longlife 400 with unions on both sides					
High-pressure hose Longlife, 10 m, ID 8, 400 bar, $2 \times EASY!Lock$	27	6.110-038.0	Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANT!!Twist. Approved for 400 bar pressure.	I	
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, $2 \times EASY!Lock$	28	6.110-024.0	1.5 m short high-pressure hose (DN 8). Comfortable EASY!Lock manual screw fitting on both sides for robust and quick connections. Durable and designed for up to 400 bar pressure.	[
				-	


























		Order no.	Description		
HIGH-PRESSURE HOSES				Ť	
Standard with unions on both sides				Г	
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	29	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANT!!Twist and 10 m long.	[
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	30	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	[
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	31	6.110-032.0	20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar.		
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	32	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	[
Food industry version with unions on both sid	es	•		Ė	
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	33	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With quick and robust EASY!Lock hand screw connection at both ends.		
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	34	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	. [
Longlife food design with screw connections a	t both	ends			
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 \times EASY!Lock	35	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.		
Special hoses					
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 \times EASY!Lock / 1 \times M22 \times 1.5	36	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22×1.5 connection and curved EASY!Loc hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	k [
WEED CONTROL					
WR 50	37	2.114-013.0	In combination with a hot water high-pressure cleaner from Kårcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter.		
WR 20	38	2.114-014.0	For thorough weed removal: The WR 20 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 20 cm wide nozzle bar and nozzle adapter.		
WR 100	39	2.114-015.0	Comfortable and fast weed removal: WR 100 weed remover with chassis, 100 cm wide nozzle bar and integrated nozzle adapter for use with hot water high-pressure cleaners.	[
WR 10	40	2.114-016.0	In combination with hot water high-pressure cleaners our WR 10 weed remover enables fast and thorough weed removal. With 10 cm spray head and nozzle adapter.		
ECO!BOOSTER				Ė	
eco!Booster TR 080	41	2.113-089.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 080).	[
QUICK CONNECT		•		Ť	
Quick coupling	42	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.		

 $[\]blacksquare$ Included in the scope of supply. \qed Available accessories.



























Add-on-kit mud sucker 44 2.641-798.0 For connection to the high-pressure hose of Karcher high-pressure cleaners. Powerful sludge suction Cleaner for the retrofitting of high-pressure cleaners to dirt pumps. 45 2.853-192.0 Elapsed time counter attachment kit 45 2.853-192.0 Elapsed time counter attachment kit for determining the appliance running time. 46 2.869-067.0 Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. 47 4.656-079.0 Exhaust gas nozzle (aval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. 48 2.880-001.0 Exhaust gas nozzle (aval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. 48 2.880-001.0 Exhaust gas nozzle (aval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. 49 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. 50 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. 41 4.114-030.0 Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. 42 4.114-030.0 Vibrasoft rotary nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of solling and surfaces. 43 4.116-00.1 Solf flat jet for cleaning and thawing operations in steam mod					Т
Add-on kit mud sucker 42 2.641-798.0 For connection to the high-pressure hose of Karcher high-pressure cleaners; Powerful sludge sucker stands and sucker 42 2.641-798.0 For connection to the high-pressure hose of Karcher high-pressure cleaners; Powerful sludge sucker stands and s			Order no.	Description	
thread. DRIVEN AND TANK CLEANING Add-on kit mud sucker 44 2.641-798.0 For connection to the high-pressure hose of Karcher high-pressure cleaners: Powerful sludge suction cleaner for the retrolitting of high-pressure cleaners to dirt pumps. Blassed time counter attachment kit 45 2.853-192.0 Elapsed time counter attachment kit for determining the appliance running time. DTHER HP ACCESSORIES Let gun 46 2.869-067.0 Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. FLUE PIPE Exhaust gas nozzle 47 4.656-079.0 Exhaust gas nozzle (aval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. BICHTUNGEN FÜR TR-CEWINDE Basket set with 9x 0-rings for TR thread 48 2.880-001.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data. Max. 300 bar, 300 MPa. 85°C. Dirt blaster, Vibrasoft, 080 50 4.114-068.0 Vibrasoft totary pozzle with rotating ponic jet for ten times greater cleaning performance. Durable dirt blaster vibrasoft totary pozzle with rotating ponic jet for ten times greater cleaning performance. Durable dirt blaster vibrasoft nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of solling and surfaces. STEAM JET NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzles 52 4.116-001.0 Sol° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing wehicles. 53 2.114-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Add	QUICK CONNECT				İ
Add-on-kit mud sucker Add 2,641-798.0 For connection to the high-pressure hose of Karcher high-pressure cleaners. Powerful sludge suction cleaner for the retrolithing of high-pressure cleaners to dirt pumps. Blapsed time counter attachment kit Add 2,853-192.0 Elapsed time counter attachment kit for determining the appliance running time. DTHER HP ACCESSORES Let gun Add 2,869-067.0 Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. FLUE PIPE Exhaust gas nozzle Add 4,656-079.0 Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube diameter up to 200 mm. DICHTLINGEN FÜR TR-GEWINDE Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube diameter up to 200 mm. DICHTLINGEN FÜR TR-GEWINDE Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube diameter up to 200 mm. DICHTLINGEN FÜR TR-GEWINDE Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube diameter up to 200 mm. DICHTLINGEN FÜR TR-GEWINDE Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube diameter up to 200 mm. DICHTLINGEN FÜR TR-GEWINDE Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube diameter up to 200 mm. DICHTLINGEN FÜR TR-GEWINDE Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube diameter up to 200 mm. DICHTLINGEN FÜR TR-GEWINDE Exhaust gas nozzle (aval connection, diameter 157 mm) for connection. For flue tube	Male coupling	43	2.115-001.0		
Succion cleaner for the retrofitting of high-pressure cleaners to dirt pumps. ADD ON KITS Elapsed time counter attachment kit	DRUM AND TANK CLEANING				Ī
Elapsed time counter attachment kit	Add-on kit mud sucker	44	2.641-798.0		
THER HP ACCESORIES Let gun 46 2.869-067.0 Short set-up time, easy transport, instant switch off — the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. Exhaust gas nozzle 50° Latti-otaci 40° A.656-079.0 Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure/water volume. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure/water volume. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure/water volume. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure/water volume. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection. Exhaust gas nozzle (oval connection, diameter 157 mm) for connection. Exhaust gas nozzle (oval connection) diameter up to 200 mm. Exhaust gas nozzle (oval connection) for the blost file of file	ADD ON KITS				
Set gun 46 2.869-067.0 Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. EXHAUST gas nozzle 47 4.656-079.0 Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. DICHTUNGEN FOR TR-GEWINDE CASAKET SET WITH 98 OFFIRE FOR TRY thread 48 2.880-001.0 ROTARY NOZZLES (DRT BLASTERS) DITT blaster, large (070/080 49 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. DITT blaster Vibrasoft, 080 50 4.114-068.0 Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. STEAM JET NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzle 50° 52 4.116-001.0 S0° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. STEAM JET NOZZLE 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. ROILOVER ONCE ROILOVER NOZZLE UNION / SPACER NOZZLE LANING Pipe cleaning hose, ID 6 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Elapsed time counter attachment kit	45	2.853-192.0	Elapsed time counter attachment kit for determining the appliance running time.	
FLUE PIPE EXHAUST gas nozzle 47 4.656-079.0 Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. PICHTUNGEN FOR TR-GEWINDE Casket set with 9x 0-rings for TR thread 48 2.880-001.0 ROTARY NOZZLES (DIRT BLASTERS) DIRT blaster, large 0.70/080 49 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. Dirt blaster Vibrasoft, 080 50 4.114-068.0 Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle 0-90* Angled Vario nozzle 0-90* Angled Vario nozzle 0-90* Steam jet nozzle 50* 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0* to 90°. For easy adjustment to all kinds of soiling and surfaces. Steam jet nozzle 50* 52 4.116-001.0 50* flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Downer of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER NOZZLE UNION / SPA	OTHER HP ACCESSORIES				Ť
Exhaust gas nozzle 47 4.556-079.0 Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. DICHTUNGEN FÜR TR-GEWINDE Gasket set with 9x O-rings for TR thread 48 2.880-001.0 BOTH BLASTERS) DIFF blaster, large DIFF blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. DIFF blaster Vibrasoft, 080 50 4.114-030.0 The dirf blaster with rotating pencil jet offers 10 times better cleaning performance. Durable dirf blaster vibrasoft rotary nozzle with rotating pencil jet for tent times greater cleaning performance. Durable dirf blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLE AND STEAM JET NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / Rollover nozzle holder Downer of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER NOZZLE UN	Jet gun	46	2.869-067.0		
high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm. Possible	FLUE PIPE				Ė
Casket set with 9x O-rings for TR thread 48 2.880-001.0 ROTARY NOZZLES (DIRT BLASTERS) Dirt blaster, large Dirt blaster, large, 070/080 49 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. Dirt blaster Vibrasoft, 080 50 4.114-068.0 Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle, 0.95° 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. STEEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Downer of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER NOZZLE UNION /	Exhaust gas nozzle	47	4.656-079.0	high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to	[
POINT blaster, large Dirt blaster, large Dirt blaster, large, 070/080 49 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. Dirt blaster Vibrasoft, 080 50 4.114-068.0 Vibrasoft rotatry nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. Steam JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Downer of jets double bras 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER NOZZLE	DICHTUNGEN FÜR TR-GEWINDE				
Dirt blaster, large Dirt blaster, large, 070/080 49 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. Dirt blaster Vibrasoft, 080 50 4.114-068.0 Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle 0-90° Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Gasket set with 9x O-rings for TR thread	48	2.880-001.0		[
Dirt blaster, large, 070/080 49 4.114-030.0 The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. Dirt blaster Vibrasoft, 080 50 4.114-068.0 Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle 0-90° Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Downer of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6 6 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	ROTARY NOZZLES (DIRT BLASTERS)				
and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. Dirt blaster Vibrasoft, 080 50 4.114-068.0 Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle .090° Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. Steam jet nozzles / Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. Steam jet nozzles 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER NOZZLE UNION / SPACER NOZZLE union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles Pipe CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Dirt blaster, large				
dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. MULTIPLE-JET NOZZLES Angled Vario nozzle 0-90° Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. STEAM JET NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE STEAM JET NOZZLE / NOZZLE	Dirt blaster, large, 070/080	49	4.114-030.0		ا د
Angled Vario nozzle 0-90° Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzles Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER Nozzle union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Dirt blaster Vibrasoft, 080	50	4.114-068.0		
Angled Vario nozzle, 055 51 4.113-008.0 Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzles Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER Nozzle union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	MULTIPLE-JET NOZZLES				
soiling and surfaces. STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE Steam jet nozzles Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER Nozzle union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Angled vario nozzle 0-90°				Ļ
Steam jet nozzle 50° 52 4.116-001.0 50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER NOZZLE UNION SPACER NOZZLE UNION 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Angled Vario nozzle, 055	51	4.113-008.0		f [
Steam jet nozzle 50° 52	STEAM JET NOZZLE / NOZZLE PROTECTOR / RO	DLLOV	ER NOZZLE		
de-icing formwork, dewaxing vehicles. Steam jet nozzle 40°, 110 53 2.114-012.0 Brass steam nozzle for operation of the HDS in steam stage. Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER Nozzle union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Steam jet nozzles				
Rollover nozzle holder Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER Nozzle union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Steam jet nozzle 50°	52	4.116-001.0		
Owner of jets double brass 54 4.764-012.0 Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). Nozzle union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Steam jet nozzle 40°, 110	53	2.114-012.0	Brass steam nozzle for operation of the HDS in steam stage.	[
detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle). NOZZLE UNION / SPACER NOZZIE UNION NOZZIE UNION NOZZIE UNION NOZZIE UNION NOZZIE UNION NOZZIE UNION NOZZIE SCREWS 150 4.112-011.0 NOZZIE SCREWS with protectors for high-pressure and power nozzles PIPE CLEANING Pipe Cleaning hose, ID 6 Pipe Cleaning hose, ID 6, 10 m, max. 250 bar 150 151 152 153 154 155 156 157 158 159 159 159 159 159 159 159	Rollover nozzle holder				
Nozzle union Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Owner of jets double brass	54	4.764-012.0		[
Nozzle screws 55 4.112-011.0 Nozzle screws with protectors for high-pressure and power nozzles PIPE CLEANING Pipe Cleaning hose, ID 6 Pipe Cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe Cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	NOZZLE UNION / SPACER				
PIPE CLEANING Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Nozzle union				
Pipe cleaning hose, ID 6 Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	Nozzle screws	55	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	
Pipe cleaning hose, ID 6, 10 m, max. 250 bar 56 6.110-046.0 The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	PIPE CLEANING				Ī
	Pipe cleaning hose, ID 6				Ī
	Pipe cleaning hose, ID 6, 10 m, max. 250 bar	56	6.110-046.0		

























				Т
		Order no.	Description	
PIPE CLEANING				_
Pipe cleaning hose, ID 6				
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	57	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	58	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	
Pipe cleaning nozzle		'		
Pipe cleaning dirt blaster D21/090	59	4.765-003.0	into encure the processary forward movement as well as convenient handling	
Pipe cleaning dirt blaster D30/090	60	4.765-010.0	jets ensure the necessary forward movement, as well as convenient handling.	[
Pipe cleaning nozzle 100	61	5.763-088.0	Pipe cleaning nozzle with 24 mm diameter. With 4 nozzles tilted back at a 30° angle.	[
Pipe cleaning nozzle	62	5.763-019.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for	[
	63	5.763-020.0	environmentally-friendly cleaning of blocked drains and pipes.	Ī
	64	5.763-021.0	30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	
FLOOR AND HARD SURFACE CLEANER				Ť
Hard Surface Cleaner FRV 30				
Hose fastening attachment kit	65	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	
Dirt trap attachment kit	66	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	[
FR 30 Me surface cleaner				Ė
Hard Surface Cleaner FR 30 Me	67	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	[
Hard Surface Cleaner FR 50				
Surface Cleaner FR 50 Me	68	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosin system.	g
Machine-specific nozzle kits for FR				Ť
Nozzle kit for FR, 1100 l/h - 1300 l/h	69	2.639-188.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (1100 to 1300 l/h).	
Machine-specific nozzle kits for FRV				Ť
Nozzle kit for FRV, 080	70	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	
□ Available accessories		1		_

 $[\]hfill \square$ Available accessories.





























RV 30 Me Surface Cleaner RV 30 Me Surface Cleaner RV 30 Me Surface Cleaner	71	Order no.	Description	
RV 30 Me surface cleaner	71			
	71			
		2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	
xtension hose FRV 30 Me and FRV 50 Me	72	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	Г
urface Cleaner FR 50 Me	-	·		Ť
RV 50 Me surface cleaner	73	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces – this means the FRV 50 Me. Hot water cleaning up to 85° C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85° C.	
OAM SYSTEMS		'		
up foam lance				
up foam lance Advanced 3, 900 l/h - 2500 h	74	4.112-065.0	Specially designed for use with aggressive cleaning agents: High-quality cup foam lance Advanced 3 with spray angle adjustment and Ecobrass for high-pressure cleaners from Kärcher.	
up foam lance DUO Advanced 3, 900 h - 2500 l/h	75	4.112-069.0	DUO Advanced 3 cup foam lance, designed for use with aggressive detergents. With instant switching to high-pressure cleaning, spraying angle adjustment and two-litre tank.	
up foam lance Basic 3, 900 l/h - 2500 l/h	76	4.112-055.0	High-quality, simple and durable: Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900-2500 l/h. Halves the cleaning agent consumption while maintaining optimum foam quality.	
-litre cleaning agent container for cup foam ance basic	77	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	
-litre cleaning agent container for cup foam ince advanced	78	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	
nno Foam Kit	•			
nno Foam Set with detergent injector	79	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For	
nno Foam Set	80	2.112-008.0	use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	
asy Foam Set				
asy Foam Set with RM injector	81	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for	
asy Foam Set	82	2.112-011.0	connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	
ozzle kits for Inno/Easy Foam Set				\vdash
ozzle kit 110 for Inno / Easy Set ,000-1,300 l/h	83	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	
oam nozzle mounting kit		•		
oam nozzle attachment kit	84	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	



























	_			_
		Order no.	Description	
MIXERS AND INJECTORS				
Cleaning agent injector				
Cleaning agent injector for high and low pressure (without nozzles)	85	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	
Cleaning agent injector for high pressure (without nozzle)	86	4.637-033.0	Cleaning agent dosage at high pressure 3 - 5 %	
Machine-specific nozzle kit with order no. 4.63	37-033	3.0		
Nozzle kit 1000-1200 l/h	87	4.769-013.0	For HD/HDS 1000 - 1200 l/h. Consists of nozzle insert + HP power nozzle + union	
Nozzle insert with order no. 4.637-032.0				
Nozzle insert from 1,100 l/h - HD	88	4.769-002.0	For high pressure with machines above 1.100 l/h	
Nozzle insert from 1,100 l/h - ND	89	4.769-006.0	For low pressure with machines above 1.100 l/h	
COUPLING PARTS				
Rotary coupling				
Rotary coupling	90	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	
Connector				
Screw socket for surface cleaners and Servo Control controllers	91	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) – $1 \times M$ 22 \times 1.5/1 \times M 18 \times 1.5.	
Y distributor	92	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	
Short spray unit	93	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). No compatible with triple nozzles.	t 🗆
EASY!Lock adapter		'		
Adapter 1 M22AG-TR22AG	94	4.111-029.0	Adapter 1 to connect the old hose with the new hose	
Adapter 2 M22IG-TR22AG	95	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	
Adapter 3 M22IG-TR22AG	96	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	
Adapter 4 TR22IG-D11	97	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	
Adapter 5 TR22IG-M22AG	98	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	

[☐] Available accessories.



























				_
		Order no.	Description	
COUPLING PARTS				
EASY!Lock adapter				
Adapter 6 TR22IG-M22AG	99	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	
Adapter 7 M18IG-TR20AG	100	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	
Adapter 8 TR20IG-M18AG	101	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	
Adapter hose extension 9 TR	102	4.111-037.0	Adapter 9 to connect the new hose with the new hose	
Adapter 12 rotary coupling EASY!Lock 22 IG - M22 × 1.8 AG	103	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	
HOSE REELS				
Automatic, self-winding hose reels for wall mo	untin	3		
Automatic plastic hose reel incl. high-pressure hose, 15 $\ensuremath{\text{m}}$	104	2.639-257.0	Spring-mounted and ready-to-use automatic hose reel for wall mounting. Simplifies handling of the high-pressure hose, shortens set-up times and increases occupational safety.	
Automatic hose reel, powder-coated steel / plastic, 20 m	105	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	
Automatic stainless steel / synthetic material hose drum, 20 m	106	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	
Automatic hose reel, coated, 20 m	107	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	
Hose reel, automatic, basalt grey-coated, 20 m	108	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	
Automatic hose reel, stainless steel, includes swivel holder, 20 m	109	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	
Automatic stainless steel hose reel, 40 m	110	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	
Zinc-coated swivel holder	111	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	
Stainless steel swivel holder	112	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	

[☐] Available accessories.

























		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reel attachment l	kit			
Attachment kit automatic hose reel HDS M/S	113	2.110-011.0	Automatic hose reel as a complete attachment kit that's easy to mount. Suitable for HDS medium and super class. For maximum convenience when winding and unwinding the high-pressure hose.	
Attachment kit automatic hose reel holder HDS M/S	114	2.110-020.0	Holder includes connection material for installing an automatic hose reel to machines in the HDS Middle and Super classes.	
Attachment kit automatic hose reel HDS M/S class	115	2.110-030.0	Automatic hose reel incl. 20 m Teflon-coated Ultra Guard high-pressure hose. The complete mounting kit is easy to fit and suitable for the HDS Middle Class and Super Class.	
FACADE AND SOLAR PANEL CLEANING				
Brushes				
Brush hard	116	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	
Brush medium	117	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	
Brush soft	118	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	
iSolar 800 Advanced (1100-1300 l/h)	119	6.368-095.0	For water flow rates of 1,100-1,300 l/h: The 800-mm iSolar water-driven brush head with two contra-rotating disc brushes and flexible angle joint ensures that photovoltaic systems are given an even clean.	ו
iSolar 400 Advanced	120	6.368-093.0	The iSolar 400 water-driven disc brush (working width 400 mm) is designed for water flow rates of 1,100-1,300 l/h. For small to medium-sized photovoltaic systems (including elevated systems).	f
Telescopic lances				
TL low pressure adapter	121	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	
Telescopic lance TL 7 F	122	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	
Telescopic lance TL 7 H	123	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	. [
Telescopic lance TL 10 H	124	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	
Telescopic lance TL 10 C	125	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	
Telescopic lance TL 14 C	126	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	

 $[\]hfill \square$ Available accessories.





















		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Telescopic lances	,			
TL high pressure adapter	127	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	
Water softening				
WS 50	128	6.368-463.0	The mobile WS 50 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water.	
WS 100	129	6.368-464.0	The mobile WS 100 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water.	
WS Regenerator	130	6.368-465.0	With the WS Regenerator regeneration system, the softening cartridges of the water softening unit: WS 50 and WS 100 can be backflushed and regenerated at the push of a button.	s C
Hoses				Ť
iSolar HP hose 7	131	6.392-978.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
iSolar HP hose 10	132	6.392-977.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
iSolar HP hose 14	133	6.392-976.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
Attachment kits and adapters				T
iSolar fall protection	134	6.988-152.0	Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case.	
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	135	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	
Wet blasting attachment without flow control (nozzles not included)	136	4.115-006.0	Addition of spray agent to the high pressure jet. For paint stripping, rust removal and descaling. Assembly on spray lance instead of high-pressure nozzle. Without water flow regulation	
Nozzle kits for wet jet unit				Ĺ
Nozzle kit for wet jet unit 070	137	2.112-027.0	Consisting of wet jet nozzle and nozzle insert – only for use in combination with wet jet unit 4.115-000.0 4.115-006.0.	
Boron carbide nozzle				
Boron carbide, for machines from 1,000 l/h	138	6.415-083.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	
DRUM AND TANK CLEANING				Ė
Barrel and tank cleaning				
Barrel cleaner BC 14/12	139	2.112-020.0	The BC 14/12 barrel cleaner is a spray unit for the interior cleaning of containers and barrels – especially oak barrels with a capacity of between 225 and 600 litres.	
WATER CONNECTION				Ė
Geka coupling				Ī
Geka connector with hose barb, R 3/4"	140	6.388-455.0	with hose liner	

[☐] Available accessories.

























	1		T	_
		Order no.	Description	
WATER CONNECTION				
Geka coupling				
Geka connector with hose barb, R 1"	141	6.388-465.0	with hose barb	
Geka connector with internal thread, R 1"	142	6.388-458.0	with female thread	T
Suction filter				
Water suction filter	143	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	ור
Suction filter with check valve	144	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	
Water fine filter				
Universal water fine filter, 25 µm	145	2.637-020.0	Water fine filter, mesh size 25 µm, max. temperature 50 °C. Protects the machine from small dirt particles in the water. Water volume up to 1200 l/h. 3/4" connection, with 1" adapter.	
Water fine filter, with adapter	146	4.730-102.0	Fine-mesh water filter, $125 \mu m$, max. temperature 50° C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to $1200 l/h$. Connection $3/4^{\circ}$, with adapter 1° .	-,
Water fine filter, 100 μm, R 1"	147	2.638-270.0	Fine-mesh water filter, $100 \mu m$, max. temperature 60° C. Connects to high-pressure cleaner. Protect the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to $1200 l/h$. Connector 1".	s [
Water supply hose		'		
Water supply hose	148	4.440-207.0	NW 19 R1" / R 3/4", up to 85 °C, for pick-up	
	149	4.440-270.0	NW 19 R1" / R1", up to 85 °C	Г
WASHING BRUSHES				Ė
Push-on washing brush				
Push-on wash brush	150	4.113-001.0	For universal use for surface cleaning. Mounted using clamp directly at the spray lance. TR thread connection	
Rotating washing brush				
Rotating wash brush for > 1000 l/h machines, nylon bristles	151	4.113-002.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperatur resistant up to 60° C, M 18×1.5 (replaceable brush insert).	
Rotating wash brush for > 800 l/h machines, natural bristles	152	4.113-005.0		
ADD ON KITS	•			
Flame monitoring attachment kit				
Flame monitoring attachment kit for HDS Compact, Middle and Super Class	153	2.644-475.0		[
☐ Available accessories.				